

## ***Full Size Features in a Compact Design***

The U34 DD pass through design undercounter dishwashing machine increases productivity and increase the availability of clean dishes. Both servers and bartenders can operate all machine functions for less waiting. The SpaceSaver™ incorporates all the features and performance characteristics of a full size machine in a compact size. Designed to optimize cleaning and sanitation results while reducing labor costs associated with hand warewashing.

- Double sided operation allows both servers and bartenders to operate all machine functions
- Auto-Chlor's proprietary WaterSaver™ design uses as little as 1.09 gallons/rack
- Large wash compartment handles standard 20 x 20 dish racks and 13" tall ware
- Powerful 1 HP pump delivers high pressure spray and mechanical cleaning action for single pass cleaning performance
- Regularly scheduled 28-day service ensures sparkling results, minimizes mechanical problems and reduces operating costs



***Ideally suited for all dishware or glassware washing stations limited by space availability. Great for:***

- |                             |                |              |          |
|-----------------------------|----------------|--------------|----------|
| • Quick Service Restaurants | • Coffee Shops | • Delis      | • Diners |
| • Lounges                   | • Clubs        | • Nightclubs | • Bars   |




### **Energy Efficient**

- Exceeds Energy Star requirements by 32%
- Low temperature chemical sanitizing saves energy

### **Total Service. Total Satisfaction.**

For more information, visit us  
at [www.autochlor.net](http://www.autochlor.net)

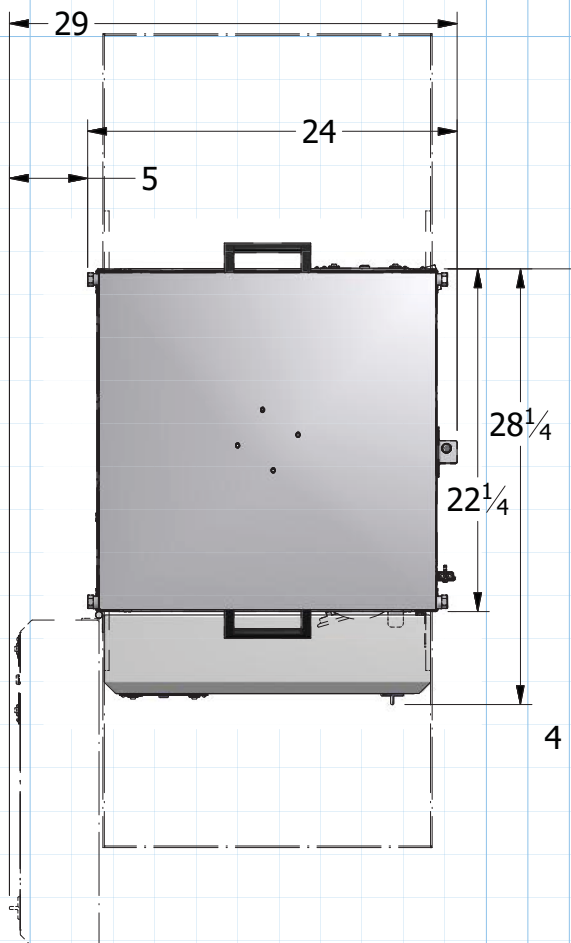

### Specifications

- A - Electrical -115 VAC, 60Hz, 1 PH  
- 20A Dedicated Circuit Recommended  
- Connects to Grounded Wall Outlet
- B - Water Supply Flow Rate 7.5 GPM Minimum  
- Water Supply Temp 140°F Recommended  
- Water Consumption 32.7 GPH (1.09 gal/rack)  
- Water Supply Connection 1/2" NPT female located inside service access door  
- Backflow protection provided by ASSE 1004 conforming air gap
- C - Drain Connection 2" MPT  
- Centerline 8" above floor
- D - Wash Cavity Clearance 13" Max Height
- E - Rack Clearance - 20 1/8" between tracks  
- Rack Size 20" x 20"

#### Available Options:

- Leg Extensions : 4", 6", or 10"
- Sustainer Heater
- Pumped Drain

Note: This unit does not produce heat or steam

