

Auto-Chlor[®] SYSTEM *PT-10 SpaceSaver*[™]




SpaceSaver[™]

- ◆ *Fast & Efficient*
- ◆ *Low Energy*
- ◆ *Durable Construction*
- ◆ *Compact Design*
- ◆ *Routine Service*

**Total Service.
Total Satisfaction.**
For more information, visit us
at www.autochlor.net



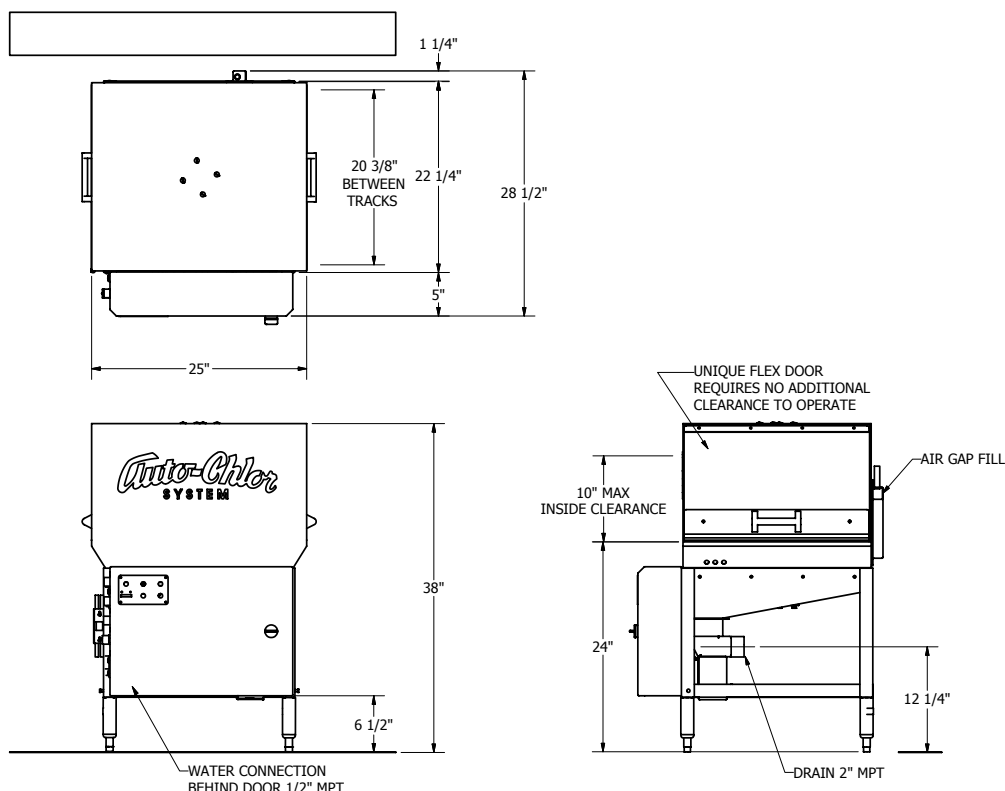

Installation Specifications

Hot Water Inlet - 1/2" MPT

45 gallons per hour @ 140°F, 7 GPM
(recommended water temperature)

Electrical Requirement
115 VAC, 60Hz, 1 Ph, 20 A

Drain Connection Accumulator - 2" MPT

Optional Pumped Drain Available

SpaceSaver[™]

- **Energy Efficient**
- **Powerful Cleaning**
- **Standard 20 x 20 Rack**
- **Easy Installation**
- **Simple Maintenance**

**Total Service.
Total Satisfaction.**