

**Auto-Chlor**  
SYSTEM

# AC Space Maker

Front Load • Low Energy Dishmachine



The **Space Maker** model **AC** dishwashing machine incorporates all the features and performance characteristics of larger machines in a compact size. Designed to optimize cleaning and sanitation results while reducing labor costs associated with hand warewashing.

- Table free installation-unique upright pull down design eliminates the need for dish tables
- Large wash compartment- small foot print
  - Handles 20" x 20" and 17" tall ware
  - 22" x 24" foot print only uses 3.34 sq. ft. of floor space smallest available
  - 75% less space than a typical dishwasher and tables
- Ergonomic working height eliminates bending and stooping to load undercounter dishwashers
- Auto-Chlor System's proprietary **WaterSaver**<sup>™</sup> design uses as little as 1.04 gal/rack
- Powerful 1 HP pump delivers high pressure spray and mechanical cleaning action for single pass cleaning performance
- Built-in water pressure regulator provides consistent water usage and cleaning results
- Regularly scheduled 28-day service ensures sparkling results, minimizes mechanical problems and reduces operating costs
- Benefiting from more than 75 years of improvements and dishwashing experience and knowledge




## Energy Efficient

- Exceeds Energy Star requirements
- Low temperature chemical sanitizing saves energy
- No Booster Heater Required

**Total Service.  
Total Satisfaction.**

**Auto-Chlor**  
SYSTEM  
autochlor.com

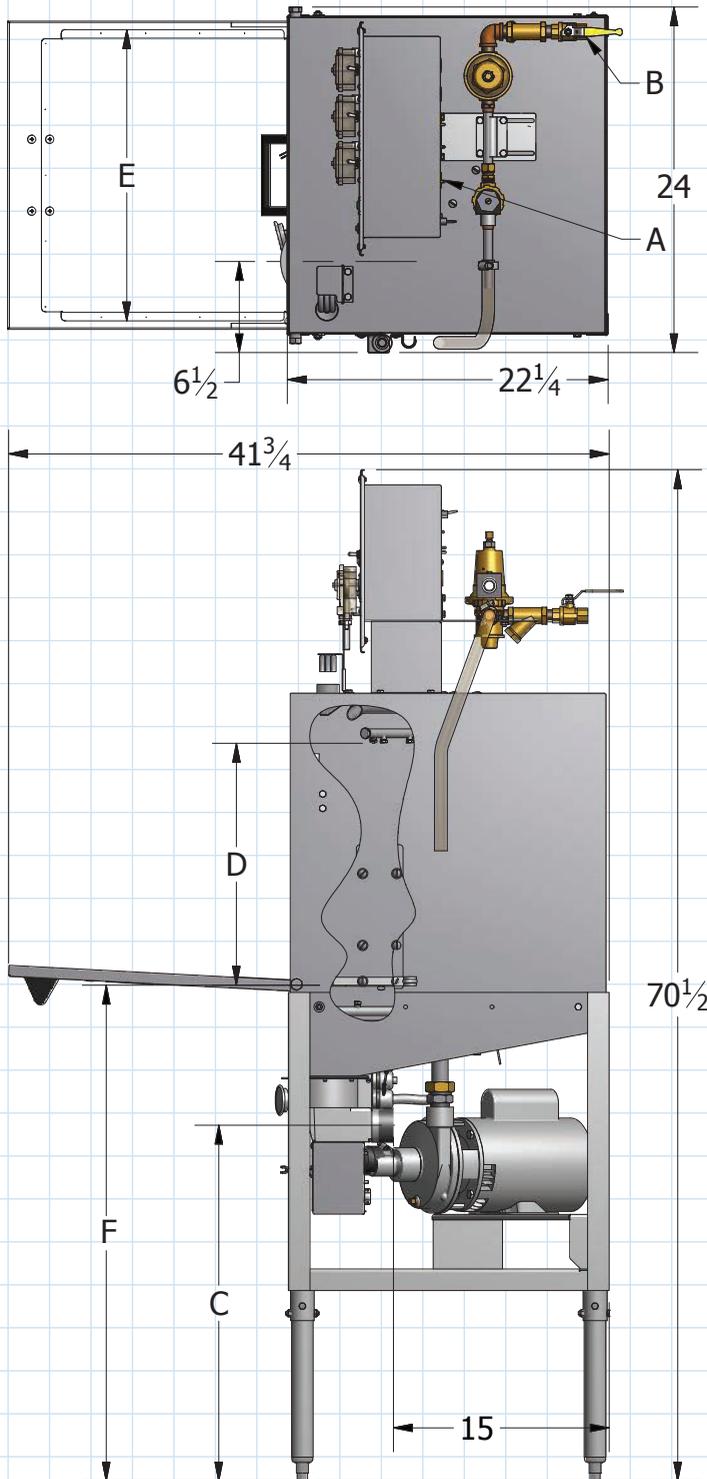

## Specifications

Standard 90 second cycle, 30 racks/hr

- A - Electrical -115 VAC, 60Hz, 1 PH
  - 20A Dedicated circuit recommended
  - Connects to grounded wall outlet or 1/2" conduit depending on local building codes
- B - Water consumption 1.09 gal/rack (31.2 GPH)
  - Water supply flow rate 7.5 GPM minimum
  - Water supply temp 140°F recommended (120° F Minimum Water Temperature)
  - Water supply connection 1/2" NPT
  - Backflow protection provided by ASSE 1004 conforming air gap or ASSE 1001 Vacuum Breaker
- C - Drain connection 2" MPT
  - Centerline 24 3/4" above floor
- D - Wash cavity clearance 17" max height
- E - Rack clearance - 20 1/8" between tracks
  - Rack size 20" x 20"
- F - 34" working height at door opening

### Available Options:

- Leg extensions : 3"
- Sustainer heater
- 72 second cycle, 35 racks/hr, 33 GPH
- 60 second cycle, 40 racks/hr, 44 GPH
- Vapor Removal System (VRX)
- Booster Heater
- Scrap Accumulator

Note: This unit does not produce heat or steam



## Energy Efficient

- Exceeds Energy Star requirements
- Low temperature chemical sanitizing saves energy

**Total Service. Total Satisfaction.**



ACM30009 (149/13)