

Auto-Chlor
SYSTEM

D2^T WaterSaver™

Double Rack • In Line • Low Energy Dishmachine

Handles tall wash orders with ease.

- Auto-Chlor Systems proprietary WaterSaver™ design uses as little as .97 gallons/rack.
- Powerful 1 HP pump delivers high pressure spray and mechanical cleaning action for single pass cleaning performance
- Washes 76 dish racks per hour, up to 304 covers
- Built in water pressure regulator provides consistent water usage and cleaning performance
- Exclusive **fill-through-the-pump** feature flushes and cleans the wash pump and spray system with every cycle
- External sump and screen provide easy access for cleaning
- Regularly scheduled 28-day service ensures sparkling results, minimizes mechanical problems and reduces operating costs
- Integrated chemical pumps and controls ensure accurate detergent and sanitizer dosing with every cycle
- Benefitting from more than 75 years of improvements and dishwashing experience and knowledge



Energy Efficient

- Exceeds Energy Star requirements
- Water saving fresh water rinsing saves energy
- Low temperature chemical sanitizing saves even more

LEARN MORE AT
energystar.gov

**Total Service.
Total Satisfaction.**

Auto-Chlor
SYSTEM
autochlor.com


Specifications

Standard 90 second cycle, 76 Racks/hr

- A - Electrical - 115 VAC, 60Hz, 1 PH
 - 20A Dedicated Circuit Recommended
 - Connects to Grounded Wall Outlet or ½" Conduit depending on local building codes
 - B - Water Consumption .97 gal/rack (72.8 GPH)
 - Water Supply Flow Rate 7.5 GPM Minimum
 - Water Temp 140°F Recommended (120°F Minimum Water Temperature)
 - Water Supply Connection ½" NPT female
 - Backflow Protection provided by ASSE 1001 Vacuum Breaker
 - C - Drain Connection 2" NPT
 - 18½" above floor
 - C* - Optional Scrap Accumulator
 - Connection 2" NPT
 - Centerline 7" above floor
 - D - Wash Cavity Clearance 27" Max Height
 - E - Rack Clearance - 20⅛" between tracks
 - Rack Size: 20" x 20"
 - F - Table Height at Machine Entrance 34"
- Available Options:
- Auto-Start
 - Leg Extensions 3"
 - Vapor Removal System (VRX)
 - 72 second cycle, 94 Racks/hr (91.2 GPH)

Optional Supplemental Water Heaters Available

An optional integrated water heating system is available for this model dishmachine. The integrated system mounts within the framework of the machine so no additional floor space is required. The integrated heater is ideal for facilities with insufficient water capacity, on-demand style water heaters or remotely located heaters. The heater can operate on 50A 208-240V circuits using either single or three phase power. Contact your local Auto-Chlor System representative for more information.

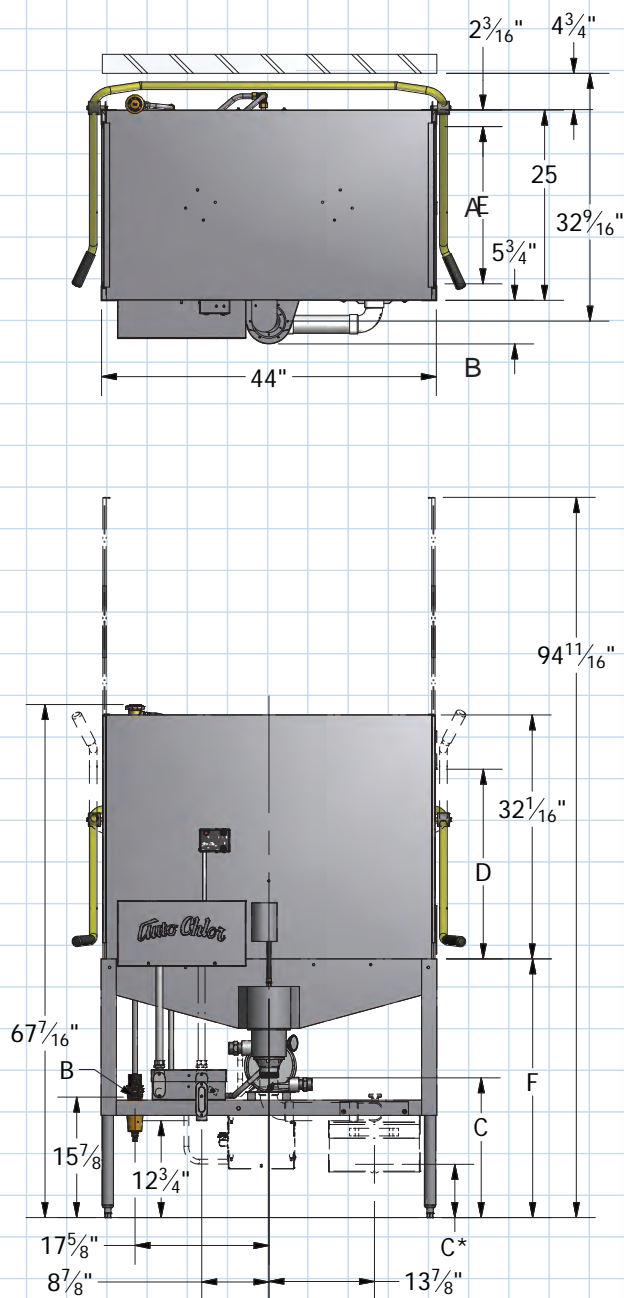

ACM30016

20260219

