

U34^TSpaceSaver™

Single Rack · Undercounter · Low Energy Dishmachine

Full Size Features in a Compact Design

The SpaceSaver™ undercounter dishwashing machine incorporates all the features and performance characteristics of a full size machine in a compact size. Designed to optimize cleaning and sanitation results while reducing labor costs associated with hand warewashing.

- Auto-Chlor's proprietary WaterSaver[™] design uses as little as 1.04 gallons/rack.
- Large wash compartment handles standard 20 x 20 dish racks and 17" tall ware.
- Powerful 1 HP pump delivers high pressure spray and mechanical cleaning action for single pass cleaning performance.
- Regularly scheduled 28-day service ensures sparkling results, minimizes mechanical problems and reduces operating costs.
- Benefiting from more than 75 years of improvements and dishwashing experience and knowledge.



Ideally suited for all dishware or glassware washing stations limited by space availability. Great for:

- Quick Service Restaurants
- Nursing Care Facilities
- Employee Dining Rooms
- Coffee Shops
- Housekeeping
- Snack Bars
- Delis
- Lounges
- Nightclubs
- Diners
- Clubs
- Bars



Energy Efficient

- Exceeds Energy Star requirements by 32%
- Low temperature chemical sanitizing saves energy


Total Service. Total Satisfaction.





U34^TSpaceSaver™

Single Rack · Undercounter · Low Energy Dishmachine

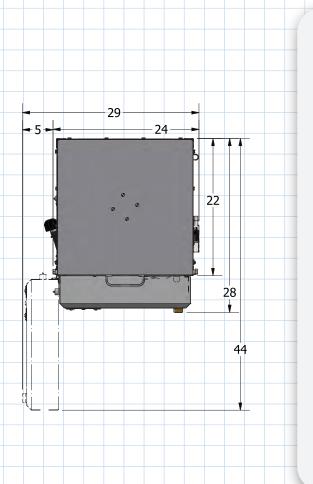


Specifications

- A. Electrical 115 VAC, 60Hz, 1 PH
 - 20A dedicated circuit
 - Connects to grounded wall outlet
- B. Water supply flow rate: 7.5 GPM minimum
 - Water temp: 120° minimum
 - Water consumption: 30.2 GPH (1.04 gal/rack)
 - Water supply connection: 1/2" NPT female located inside service access door.
 - Backflow protection provided by ASSE 1004 conforming air gap
- C. Drain connection: 2" MPT
 - Centerline: 8" above floor
- D. Wash cavity clearance: 17" max height
- E. Rack clearance: 20 1/8" between tracks
 - Rack size: 20" x 20"

Available Options:

- Leg extensions: 4", 6" or 10"
- Sustainer heater
- Pumped drain
- Booster Heater

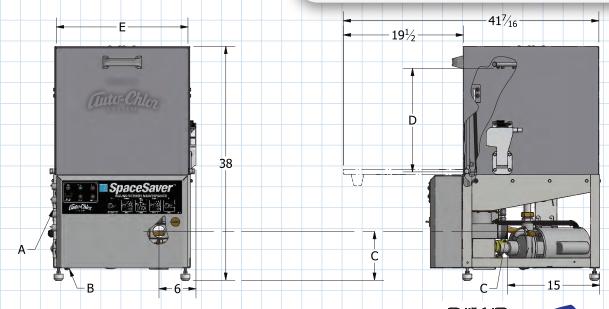







ACM300012

255/17



